


SLATS

0.6mm, continuous roll formed, interlocking, coated Galvabond[®] steel slats. Nominal effective pitch of 100mm. Zinc coating of not less than 275g/m². Slotted ventilation percentages per slat indicated in brackets.



Information relating to product measurements, colours and specifications is accurate at the time of print and is subject to slight variations resulting from the manufacturing process. B&D reserves the right to change product specifications at any time. Take care when handling and storing slats. Damage to the slats can affect door performance.

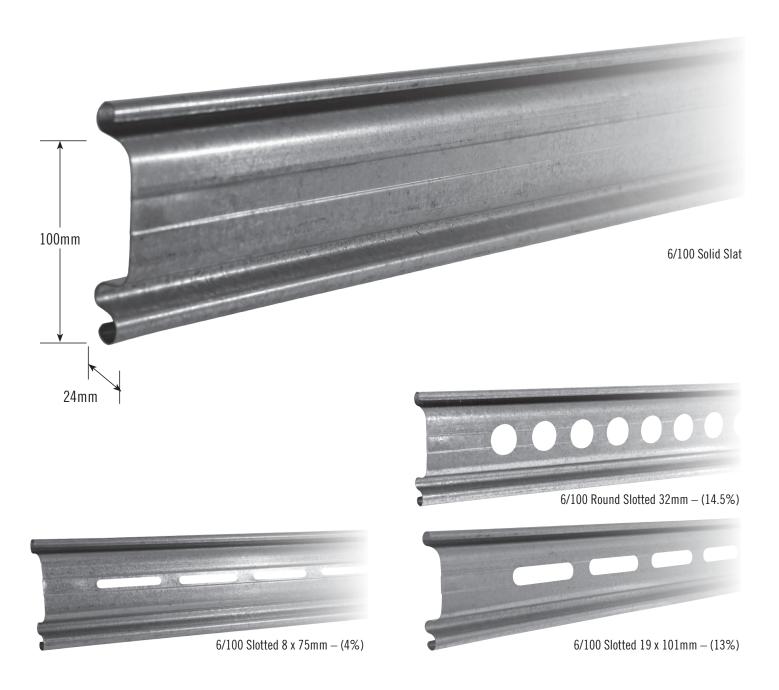

Call 13 62 63 or visit www.bnd.com.au for further information.