


## S75 / S100 Clearance Requirements

### Standard Fitment Requirements

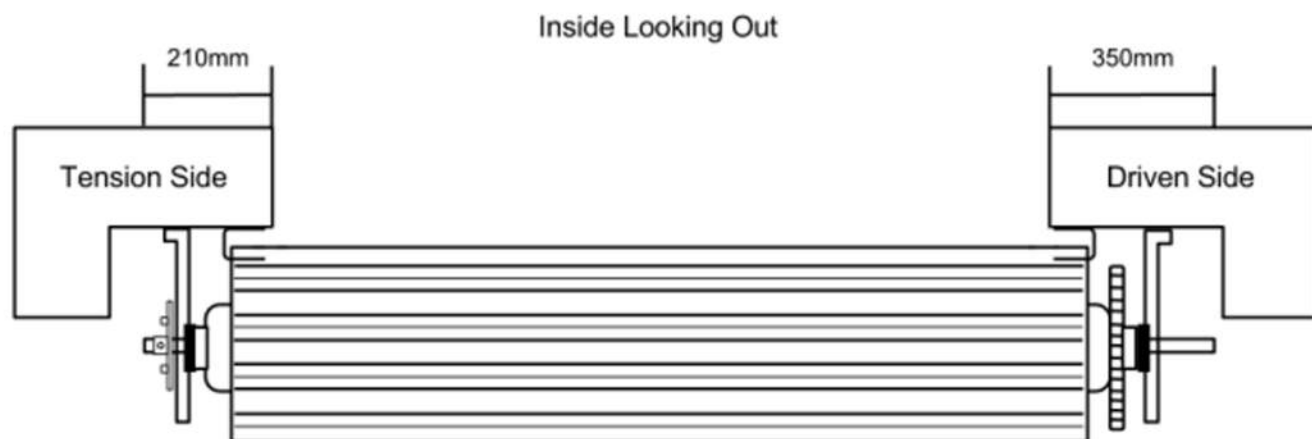

### Notes -

Driven side can be left or right side.

If required tension side can be reduced to 100mm with stubshaft, and tension put on driven side.

Driven side can be reduced to 200mm by mounting motor/reduction gearbox in board.

Doors can be fitted with less headroom if required (Standard mounting is more desirable)

### S75

### S100

opening height	headroom	diameter	opening height	headroom	diameter
2.0m	605	360	2.0m	605	370
2.5m	605	380	2.5m	610	410
3.0m	605	400	3.0m	620	430
3.5m	605	410	3.5m	635	450
4.0m	610	420	4.0m	640	460
4.5m	620	430	4.5m	655	480
5.0m	630	440	5.0m	665	490
5.5m	640	460	5.5m	670	510
6.0m	650	480	6.0m	700	530
6.5m	660	480	6.5m	700	530

